



NICOLAS CORREA, S.A.

CARACTERÍSTICAS TÉCNICAS
TECHNICAL CHARACTERISTICS


CARACTERISTIQUES TECHNIQUES
TECHNISCHE DATEN

MAQUINAS - MACHINES - MACHINES - FRASMASCHINE		B - BV		A-25				A-10-15		
		B-20	BV-25	A25/25	A25/30	A25/35	A25/40	A-10	A-15	
MESA TABLE TISCH	SUPERFICIE - SURFACE OBERFLACHE - SURFACE	mm.	1800x 500	1800x 500	2800 x 900	3300 x 900	4300 x 900	4300 x 900	1500x 630	1800x 630
	RANURAS EN T - T SLOTS T NUTEN - RAINURES EN T	mm.	6x18	6x18	7x22	7x22	7x22	7x22	8x18	8x18
	DISTANCIA ENTRE RANURAS - DISTANCE BETWEEN T SLOTS ABSTAND DER T NUTEN - ECARTEMENT ENTRE RAINURES	mm.	71	71	125	125	125	125	71	71
RECORRIDOS AUTOMATICOS COURSES AUTOMATIC TRAVERSE AUTOMATIC AUTOMATISCHE BEWEGUNGEN	LONGITUDINAL - LONGITUDINAL LONGS - LONGITUDINALE	mm.	1500	1500	2500	3000	3500	4000	1300	1600
	TRANSVERSAL - CROSS QUER TRANSVERSALE	mm.	650	650	1000	1000	1000	1000	630	630
	VERTICAL - VERTICAL VERTIKAL - VERTICALE	mm.	600	600	1000	1000	1000	1000	630	630
MANDRINO BROCHE SPINDLE SPINDEL	DIAMETRO DEL APCYO DELANTERO. DIAMETER ON FRONT BEARING DURCHMESSER IM VORDEREN LAGER DIAMETRE EN PALIER AVANT	mm.	85	90	85	85	85	85	75	75
	CABEZA DEL MANDRINO - SPINDLE NOSE AUFNAHME - NEZ DE LA BROCHE		150-50	150-50	150-50	150-50	150-50	150-50	150-50	150-50
REVOLUCIONES VITESSES SPEEDS SPINDELUMDREHUNG	Nº. DE VELOCIDADES - NUMBER OF SPEEDS ANZAHL DER GESCHWINDIGKEITEN - NOMBRE DE VITESSES		* ∞ 18	∞	* ∞ 18	* ∞ 18	* ∞ 18	* ∞ 18	* ∞ 18	∞
	GAMA RANGE - BEREICH - GAMME (rpm- t /min- U/min.)		*25/3150 40/2000	40/3150	*25/3150 40/2000	*25/3150 40/2000	*25/3150 40/2000	*25/3150 40/2000	*25/3250 63/3150	25/3250
AVANCES AVANCES FEEDS VORSCHUBE	NUMERO NUMBER ANZAHL - NOMBRE		∞	∞	∞	∞	∞	∞	∞	∞
	GAMA - RANGE - BEREICH - GAMME	mm/min.	5/5000	5/5000	5/5000	5/5000	5/5000	5/5000	5/5000	5/5000
	AVANCES RAPIDOS - RAPID TRAVERSE ÉILGANGE - AVANCES RAPIDES	mm/min.	8000	8000	5000	5000	5000	5000	8000	8000
POTENCIA PUISSANCE MOTOR POWER ANTRIEBLEISTUNG	MANDRINO - ESPINDLE MOTOR FRASSPINDEL MOTOR - BROCHE	CV.	20 *25	25	25	25	25	25	10/12,5 *16	16
	AVANCES - FEED MOTORS VORSCHUBEMOTOREN - AVANCES	Nm.	3x32	3x32	3x32	3x32	3x32	3x32	3x18	3x18
PESOS POIDS WEIGHTS GEWICHTE	MAXIMO ADMISIBLE EN MESA. MAXIMUM CARRYING LOAD ON THE TABLE. ZULASSIGE TISCHBELASTUNG POIDS ADMIS SUR LA TABLE	Kgs.	3000	3000	5000	7000	7000	7000	3000	3000
	DE LA MAQUINA - MACHINE WEIGHT MASCHINENGEWICHT - DE LA MACHINE	Kgs.	5400	7000	12500	13500	14500	14500	6500	6700

* (OPCION) Máquinas equipadas con motor mandrino D.C.

DIMENSIONES A-25

A-25

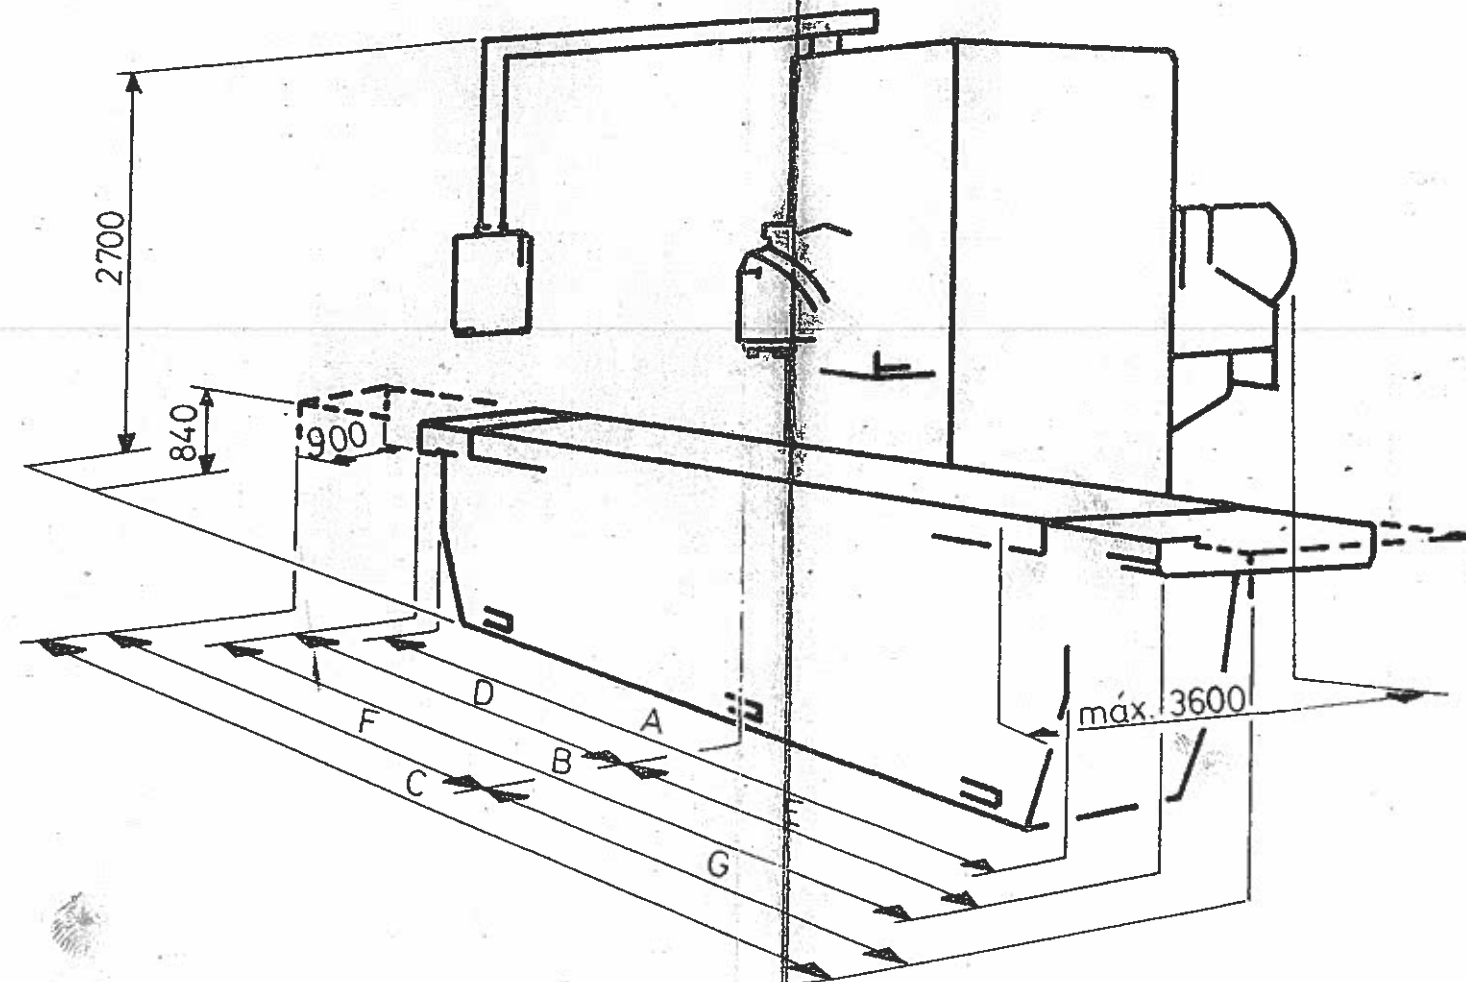

2

A-25/25	
A	4100
B	4430
C	6590
D	2215
E	2215
F	3295
G	3295

3

A-25/30	
A	5000
B	5330
C	7810
D	2665
E	2665
F	3905
G	3905

A-25/35	
A	5000
B	5810
C	9110
D	2905
E	2905
F	4555
G	4555

A-25/40	
A	5000
B	5810
C	9610
D	2905
E	2905
F	4805
G	4805